

## General Industrial Spring Driven Reels

### Series RT

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use.

Model	Hose I.D.	Hose Length	Max PSI	NPT(M) Hose Outlet	NPT(F) Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
RT435-OLP	1/4"	35'	300	1/4"	3/8"	16 1/2 x 5 3/4 x 17 7/8	21
RT450-OLP	1/4"	50'	300	1/4"	3/8"	16 1/2 x 5 3/4 x 17 7/8	24
RT635-OLP	3/8"	35'	300	1/4"	3/8"	16 1/2 x 5 3/4 x 17 7/8	21
RT650-OLP	3/8"	50'	300	1/4"	1/2"	16 1/2 x 6 1/4 x 17 7/8	27
RT835-OLP	1/2"	35'	300	1/2"	1/2"	16 1/2 x 6 1/4 x 17 7/8	27
RT850-OLP	1/2"	50'	300	1/2"	1/2"	16 1/2 x 7 3/4 x 17 7/8	37



**Series RT**  
RT650-OLP  
Patent No. 7,150,425

## Heavy Duty Industrial Spring Driven Reels

### Series 7000

Reelcraft's Series 7000 is very robust and ideal for the most demanding applications. The reel's base and guide arms are formed from high-grade steel and are engineered with structural forms and gussets to yield the greatest amount of strength.

Model	Hose I.D.	Hose Length	Max PSI	NPT(M) Hose Outlet	NPT(F) Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
<b>Low Pressure Air/Water Reels</b>			Maximum temperature 150 °F. Furnished standard with PVC hose.				
7650 OLP	3/8"	50'	300	1/4"	1/2"	19 3/4 x 7 x 20 1/4	43
7670 OLP	3/8"	70'	300	1/4"	1/2"	19 3/4 x 7 x 20 1/4	47
7850 OLP	1/2"	50'	300	3/8"	1/2"	19 3/4 x 7 x 20 1/4	47
7925 OLP	3/4"	25'	250	3/4"	3/4"	19 3/4 x 7 x 20 1/4	47
<b>Medium Pressure Oil Reels</b>			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R1T one wire braid hose.				
7850 OMP	1/2"	50'	3250	1/2"	1/2"	19 3/4 x 7 x 20 1/4	57
<b>High Pressure Grease Reels</b>			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R2T two wire braid hose.				
7650 OHP	3/8"	50'	4800	1/4"	1/2"	19 3/4 x 7 x 20 1/4	60




**Series 7000**  
7850 OLP

## Compact Spring Driven Dual Pedestal Reels

### Series DP5000 / DP7000

Reelcraft's compact dual pedestal Series DP reels feature an innovative, non-welded, interlocking base. Independent testing to military standards has proven these reels stand up to heavy vibration, which makes them especially strong and ideal for truck-mounted applications.

Model	Hose I.D.	Hose Length	Max PSI	NPT(M) Hose Outlet	NPT(F) Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
<b>Low Pressure Air/Water Reels</b>			Maximum temperature 150 °F. Furnished standard with PVC hose.				
DP5450 OLP	1/4"	50'	300	1/4"	1/2"	14 3/8 x 8 x 16 3/8	34
DP5650 OLP	3/8"	50'	300	1/4"	1/2"	14 3/8 x 9 x 16 3/8	44
DP7650 OLP	3/8"	50'	300	1/4"	1/2"	16 1/2 x 8 x 17	50
DP7850 OLP	1/2"	50'	300	3/8"	1/2"	16 1/2 x 8 x 17	53
<b>Medium Pressure Oil Reels</b>			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R1T one wire braid hose.				
DP5835 OMP	1/2"	35'	3250	1/2"	1/2"	14 3/8 x 9 x 16 3/8	54
DP7850 OMP	1/2"	50'	3250	1/2"	1/2"	16 1/2 x 9 x 17	64
<b>High Pressure Grease Reels</b>			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R2T two wire braid hose.				
DP7650 OHP	3/8"	50'	4800	1/4"	1/2"	16 1/2 x 8 x 17	65

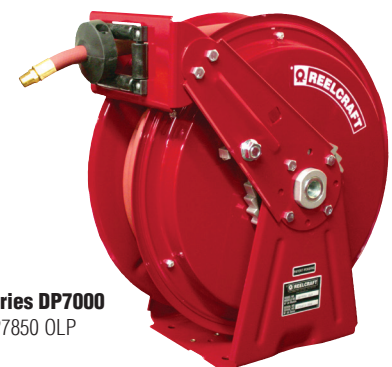

**Series DP7000**  
DP7850 OLP

Many other sizes and models available as standard.  
Contact your local sales rep for more information.