




WHOLESALE DIRECT INC.

5620 WEST 65TH STREET
CHICAGO, IL 606389
PHONE: 773-585-7200
Web Site: www.wholesaledirectinc.com




3000 lm

HELLA VALUEFIT S3000 LED

3000 lm *, compact housing, type of protection: IP 67 (sumergible)
9 high power LEDs, die-cast aluminum housing, PC lens with optical
disperser, protection against reverse polarity, ECE-R10, CE, RoHS

Voltage	Multivolt 12 – 48 VDC
Wattage	30 W
Mounting	Stainless steel mounting bracket
Dimension	3.93" Wx4.84"Hx2.87"D/ 100.0x123.0x73.0mm
Part number	357109002 Close Range, Retail Box




1000 lm

HELLA VALUEFIT 5RD 1.0 LED

1000 lm *, flat and compact, type of protection: IP 67 (sumergible)
9 high power LEDs, die-cast aluminum housing, PC lens with optical
disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	15 W
Mounting	Stainless steel mounting bracket
Dimension	4.2"Wx5.2"Hx1.6"D/ 133.0x107.0x41.5mm
Part number	357101002 Close Range, Blister Pack 357100002 Long Range, Blister Pack

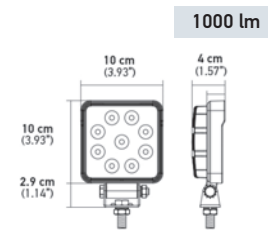


1000 lm

HELLA VALUEFIT 4SQ 1.0 LED

1000 lm *, flat and compact, type of protection: IP 67 (sumergible)
9 high power LEDs, die-cast aluminum housing, PC lens with optical
disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	15 W
Mounting	Stainless steel mounting bracket
Dimension	3.9"Wx3.9"Hx1.5"D / 129.0x100.0x40.0mm
Part number	357103002 Close Range, Blister Pack 357102002 Long Range, Blister Pack




1100 lm

HELLA MODULE 70

Fiber-glass reinforced compact plastic housing, Heavy Duty bracket,
IP6K7, 6K9K (water tight system with incorporated
pressure compensation valve) included, H3 bulb

Voltage	12V
Wattage	55W
Housing Material	HD Plastic
Dimensions	3.2"Wx4.3"Hx2.9"D/ 83.0x111.0x75.3mm
Part number	996176491 Close Range 996176497 36 Pieces




1050 lm

HELLA MATADOR

Fiber-glass reinforced plastic housing, Heavy Duty bracket,
Protective grill and external switch, IP5K9K (dust protected and
withstands high pressure wash), Close range


Voltage	12 or 24V
Wattage	15 W
Mounting	Stainless steel mounting bracket
Dimension	6.6"Wx8.8"Hx4.9"D/ 168.0x224.0x125.0mm
Part number	H15470001

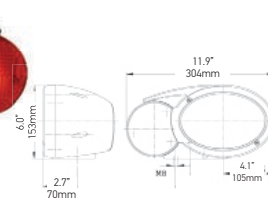

HELLA C120 COMBINATION HEADLAMPS

HELLA Free-Form reflector technology provides superior optics,
Fiber-glass reinforced plastic housing, Surface mount or bracket
mount available


Light Source	12V HB2/H3/P21W/T4W
Mounting	Stainless steel mounting bracket
Dimension	11.9"Wx6"Hx2.7"D / 304.0x153.0x70.0mm
Part number	996167051 Lefthand 996167061 Righthand 996167191 Lefthand Stud 996167201 Righthand Stud



HELLA RALLYE 4000 LED

3 High performance LED's, Homogenous and ideal illumination due to
computer optimized, Free-form reflector, Reduces driver
fatigue due to the color temperature being close to daylight,
6000°K Color Temperature, Multivolt 9– 32 VDC, 30/1W


Mounting	Aluminum Alloy Braded
Dimensions	8.74"Wx9.4"Hx5.15"D/ 222.0x239.0x131.0mm
Wattage	30W
Application	Long range, Off road
Part number	011002101



HELLA C220 COMBINATION HEADLAMPS

HELLA Free-Form reflector technology provides superior optics,
Fiber-glass reinforced plastic housing, Heavy Duty vibration
dampened mounting stud bracket

Voltage	12V
Light Source	12V H7/H3/P21W/T4W
Mounting	Stainless steel mounting bracket
Dimension	8.8"Wx5.9"Hx3.9"D/ 225.4x150.0x101.0mm
Part number	996174251 Lefthand 996174261 Righthand



2100 lm (driving)

HELLA VALUEFIT 500 LED

15 High intensity LEDs, Striking LED accent light design, Die-cast
aluminum housing with effective heat dissipation, Driving light
pattern, Wire leads (single), DT connector (Kit), Protection: IP67,
Color temperature: 6000 K / 2560 K with amber cover

Voltage	Multivolt 10 – 30 VDC
Wattage	22.5W
Dimensions	6"Wx6.56"Hx2.67"D/ 152.5x166.7x68.0mm
Part number	358117161 Aux Light 358117161 Kit 358117161 Amber Cover





WHOLESALE DIRECT INC.


5620 WEST 65TH STREET
CHICAGO, IL 606389
PHONE: 773-585-7200
Web Site: www.wholealedirectinc.com



HELLA MLB 100 LED

Non-volatile memory recalls last flash pattern, Multiple units can be synchronized, Reverse polarity protection, Weatherproof and vibration resistant design, 5 year warranty

Voltage	Multivolt 12 / 24 VDC
Wattage	50W
Approvals	SAE J845 Class 1, California Title 13, ECE R65, ECE R10
Part number	H27996001 Fixed Amber H27996011 Magnetic Amber

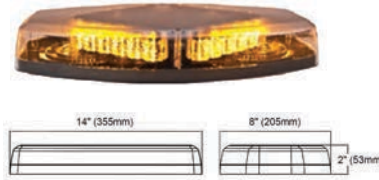

HELLA MLB 50 LED

Non-volatile memory recalls last flash pattern, Low power function for night time use, Multiple units can be synchronized, Reverse polarity protection, Weatherproof and vibration resistant, 5 year warranty

Voltage	Multivolt 12 / 24 VDC
Wattage	46W
Approvals	SAE J845 Class 1, California Title 13, ECE R10
Part number	H27995001 Fixed Amber H27995011 Magnetic Amber



HELLA K-LED 100

Uses 10 LEDs, 11 flash patterns with non-volatile recalls, multi-unit synchronization, reverse polarity protection, weatherproof and vibration resistant design


Voltage	Multivolt 12 / 24 VDC
Wattage	42W
Approvals	SAE J845 Class 1, California Title 13, ECE R65, ECE R10
Part number	H27112001 Fixed Mount H27112011 Magnetic H27112031 DIN Pole



HELLA FULL SIZE LED LIGHT BAR 60"

High performance LED lightbar, smoked lens for a stealth look and good UV protection, integrated traffic director function, Strap kit mounts for most popular US cars available.

Voltage	Multivolt 12 / 24 VDC
Wattage	103W, 130W, 143W, 182W
Approvals	SAE J845 Class 1 (Amber, Red, White & Blue) CA Title 13 (Amber, Red & Blue)
Part number	H27941031 60" Amber, TO, AL, STT

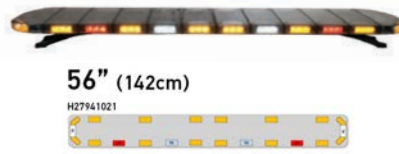

HELLA FULL SIZE LED LIGHT BAR 56"

High performance LED lightbar, smoked lens for a stealth look and good UV protection, integrated traffic director function, Strap kit mounts for most popular US cars available.


Voltage	Multivolt 12 / 24 VDC
Wattage	103W, 130W, 143W, 182W
Approvals	SAE J845 Class 1 (Amber, Red, White & Blue) CA Title 13 (Amber, Red & Blue)
Part number	H27941021 56" Amber, TO, AL, STT



HELLA FULL SIZE LED LIGHT BAR 48"

High performance LED lightbar, smoked lens for a stealth look and good UV protection, integrated traffic director function, Strap kit mounts for most popular US cars available.

Voltage	Multivolt 12 / 24 VDC
Wattage	103W, 130W, 143W, 182W
Approvals	SAE J845 Class 1 (Amber, Red, White & Blue) CA Title 13 (Amber, Red & Blue)
Part number	H27941001 48" Amber H27941091 48" Amber, TO, AL

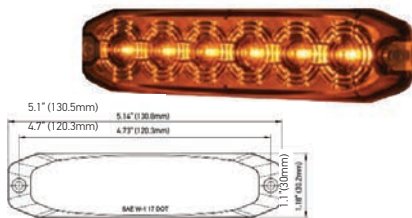

HELLA MST6E MINI LED

Super low profile for discreet placement, Frosted lens for glowing body technology and 180 degree visibility, 21 user selectable flash patterns including steady on, 5 year warranty

Voltage	Multivolt 12 / 24 VDC
Wattage	6W
Approvals	SAE J845 Class 1
Part number	H22897001 Amber H22897011 Amber/White



HELLA LOW PROFILE LED WARNING & TRAFFIC STICKS

Super low profile for stealth look and minimize rear view obstruction, Non-volatile memory recalls last flash pattern used at power up, Reverse battery protection, Available in amber, white, red, blue, 5 year warranty

Voltage	8 Heads = 48W
Approvals	SAE J595 Class 1(1), California Title 13(2), ECE R10
Part number	H27916001 Amber H27919051 4 Switch Control Panel



HELLA LED ROCKER SWITCH

Easy to install normally open rocker switch with green LED indicator, 3/16-inch quick connector terminals for easy connection

Voltage	12V
Current	20A
Dimensions	3/4" Diameter mounting hole
Part number	H61923001

